



LH Series Cylindrical Locks

ANSI Grade 1 Heavy Duty I/C Type

FEATURES

- >Heavy duty, commercial grade cylindrical lockset, designed for maximum security, heavy traffic usage, fast and easy installation.
- >Knobs include steel reinforcement.
- >Internal steel mechanisms are corrosion treated for normal atmospheric conditions.
- >Heat treated heavy gauge cold rolled steel spindles add greater strength and security.
- >Threaded roses both sides hold lock firmly in place.


T 886 6 3840722
F 886 6 3840715
18 Gungye 3rd Road, Annan, Tainan 709, Taiwan.
sd@klacci.com

life unlocked
www.klacci.com

Klacci is a registered brand of I-Tek Metal Manufacturing, Co., Ltd. Taiwan.

FEATURES

- >Heavy duty, commercial grade cylindrical lockset, designed for maximum security, heavy traffic usage, fast and easy installation.
- >Knobs include steel reinforcement.
- >Internal steel mechanisms are corrosion treated for normal atmospheric conditions.
- >Heat treated heavy gauge cold rolled steel spindles add greater strength and security.
- >Threaded roses both sides hold lock firmly in place.

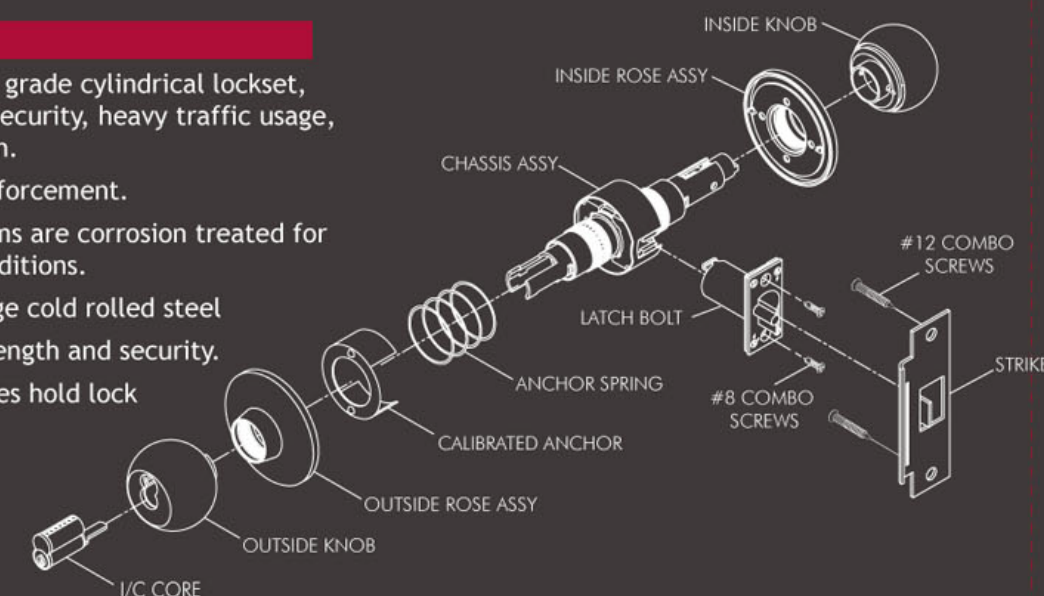

SPECIFICATIONS

Applications	Heavy duty commercial, institutional, governmental and industrial buildings where high quality mechanism is required.
Door Thickness	1 3/8" to 2" thickness wood or metal door installation.
Backset	2 3/4" standard, 2 3/8", 3 3/4" and 5" optional.
Latchbolt	1/2" throw, UL listed, faceplate self-adjusted, 3/4" throw fire door deadlatch available.
Handing	Completely reversible.
Strike	ANSI strike standard, T-strike or Full lip strike optional.
Trim	Roses are heavy wrought brass, bronze or stainless steel, installed over wrought steel reinforcing plates. Knobs are brass, bronze or stainless steel, secured by steel knob retainer which cannot be depressed when lock has been locked.
Door Preparation	2 1/8" cross bore, 1" edge bore.
Master Keying	Can be masterkeyed or grand masterkeyed.
Interchangeable Core	6 or 7-pin, Compatible with Best® and Falcon® small format interchangeable cores.
Finishes	605, 606, 612, 613, 625, 626, 629 and 630.
Functions	Entry / Office Lock (01), Store Door Lock (02), Classroom Lock (03), Communicating Lock (04), Storeroom Lock (05), Institutional Lock (09), Connecting Room / Exit Lock (63).
Certifications	UL listed for "A" label (3-hour) single swinging door (4' x 8'). ITS Certified for ANSI/BHMA A156.2, Series 4000 Grade 1.